

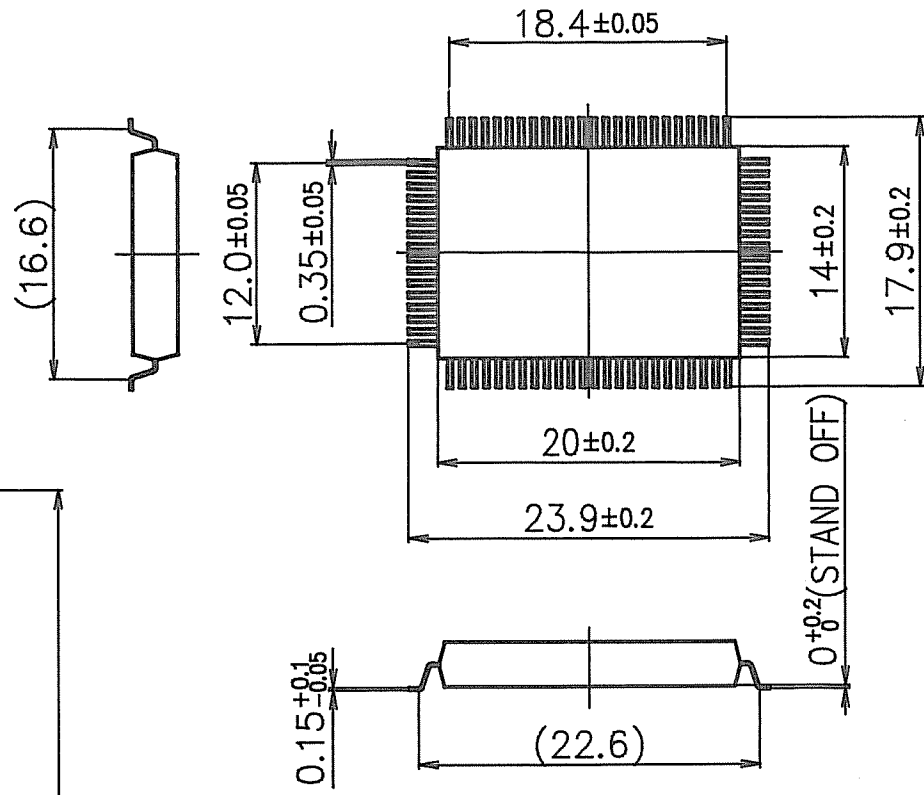


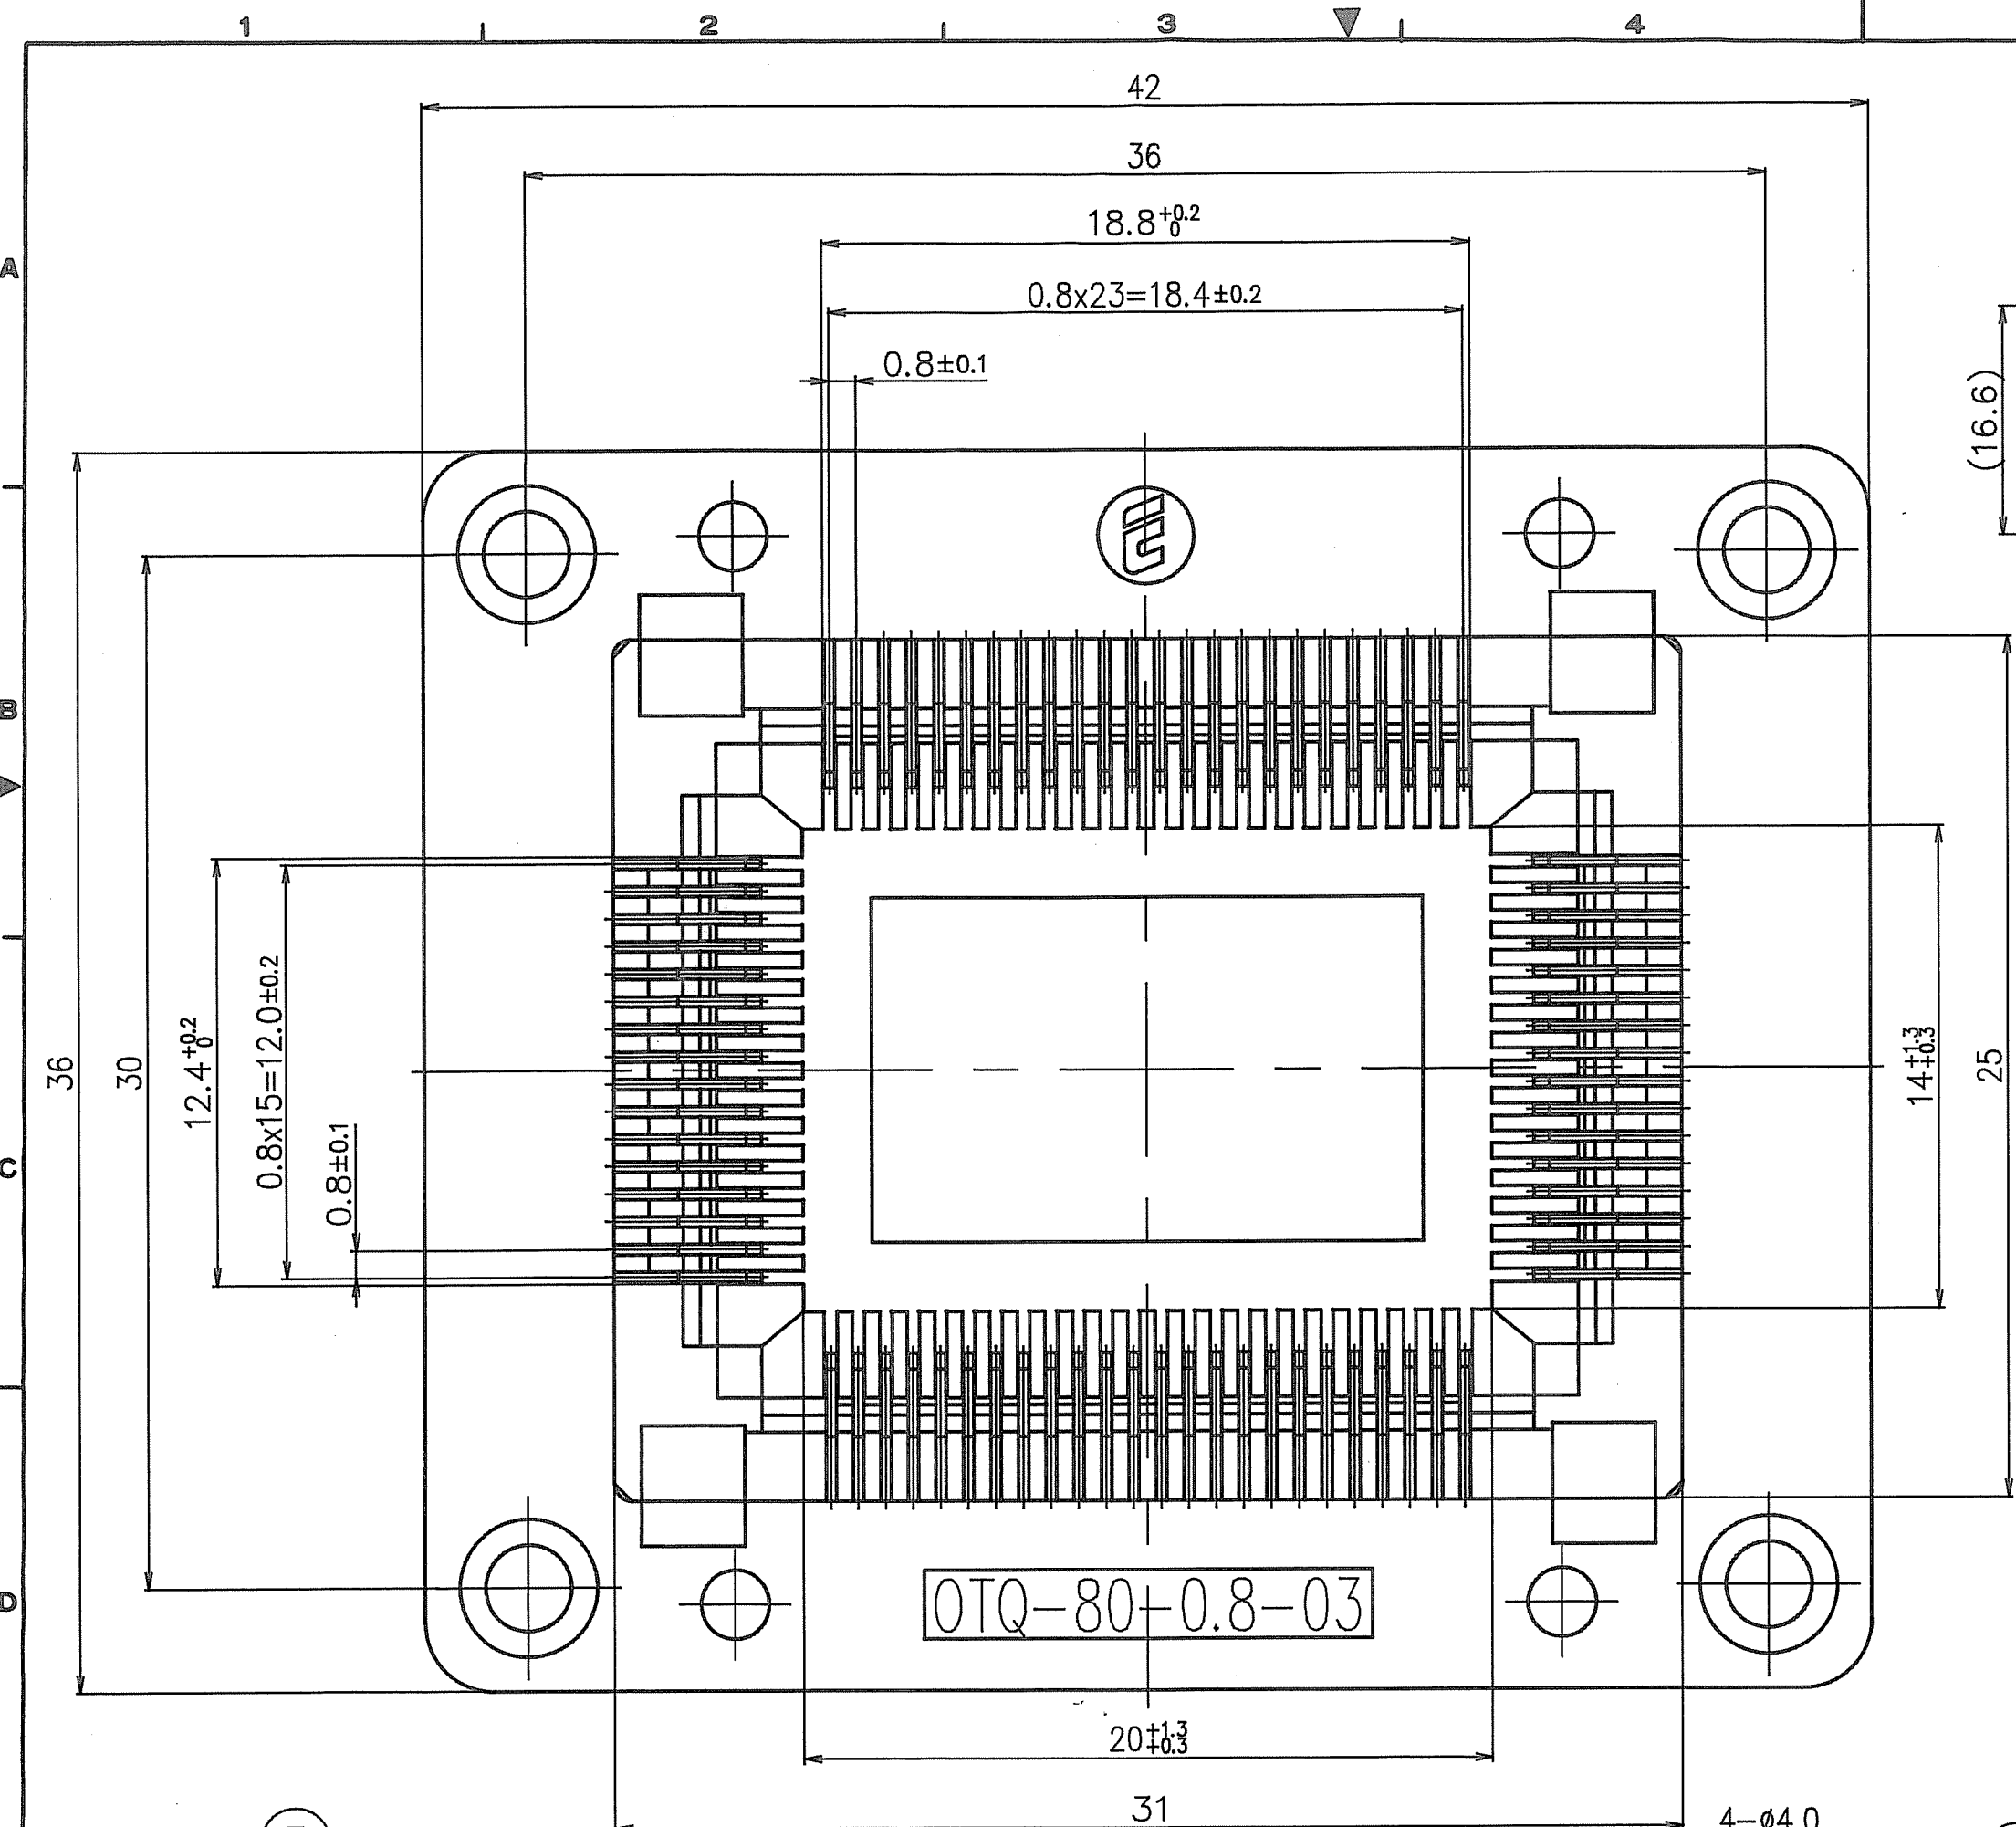


MATCHING DEVICE

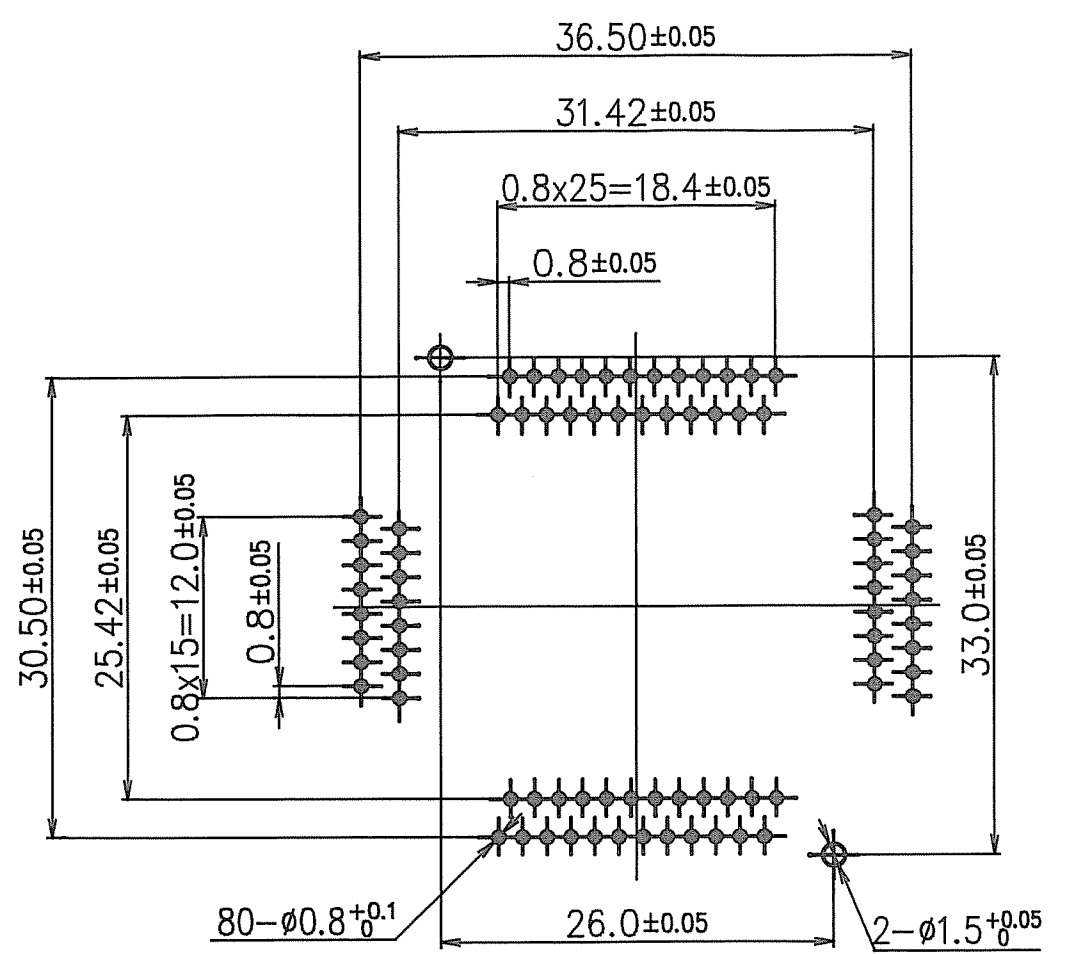

P.C.B PATTERN (TOP VIEW)

SPECIFICATION	
CONTACT RESISTANCE	30 mΩ or less at 10mA (INITIAL)
DIELECTRIC WITHSTANDING VOLTAGE	700V.A.C RMS for 1 minute
INSULATION RESISTANCE	1000MΩ or more at 500V.D.C
RATED CURRENT	1 A
OPERATING TEMPERATURE	-65 ~ +150 degree
RETENTION FORCE	0.5Kg for 1 minute
INSERTION	10000cycle (MECHANICAL)
CONTACT FORCE	30 ±20g
MATERIAL	BODY PEI
	CONTACT PIN BeCu ,Au PLATING
ACTUATION FORCE	MAX 4.0 kg

改訂図
NO.2

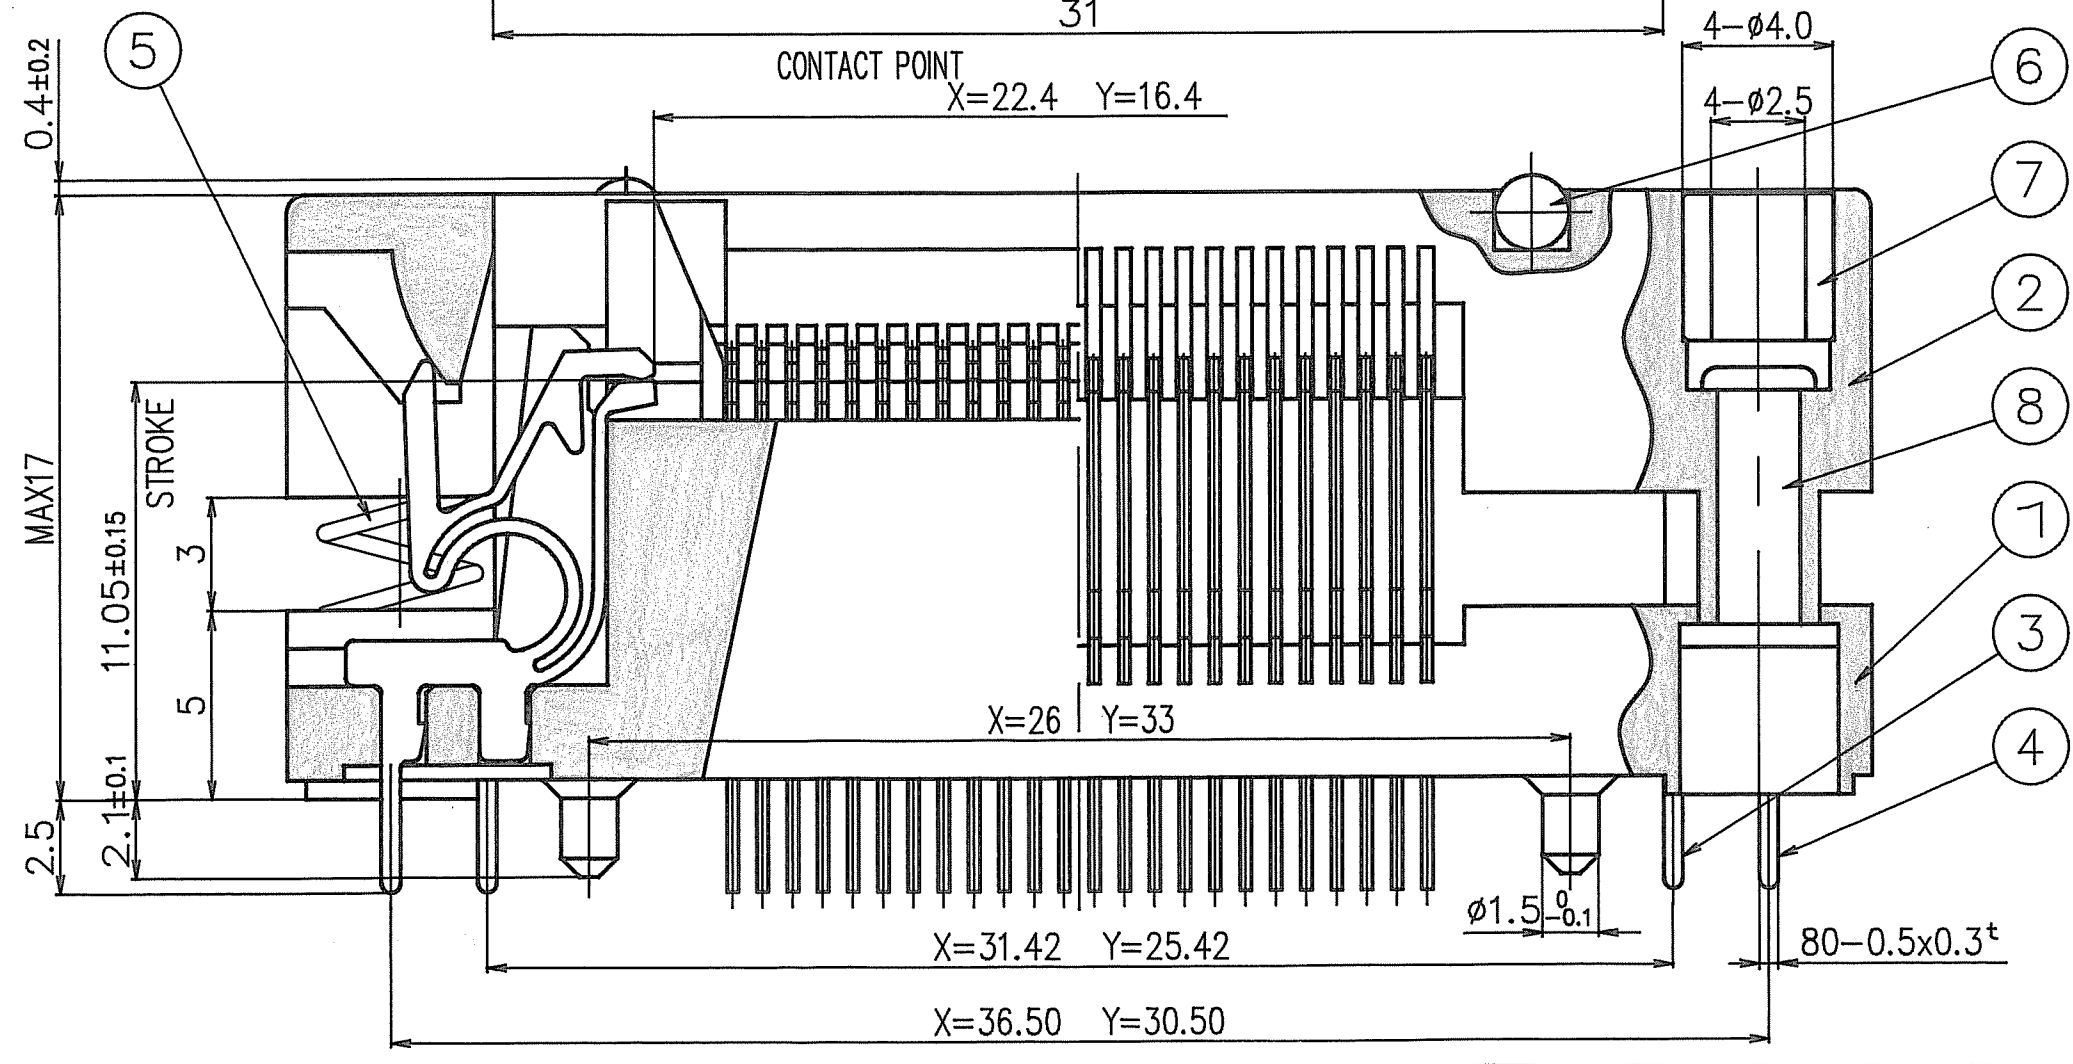

8	OTQ-80-0.5-02-004	55-111-273-01	RIVET ッベット	Al	4	
7	OTQ-80-0.8-01-003	55-111-109-01	PIPE ハイブ	SUS	4	
6	φ2.0	55-113-075-01	BALL ボール	SUS	4	
5	OTQ-80-0.8-01-004	55-112-051-01	COIL SPRING コイルスプリング	SUS	4	
4	OTQ-100-C001	55-110-470-01	CONTACT PIN "DT0"	BeCu	40	
3	OTQ-100-C002	55-110-471-01	CONTACT PIN "DU0"	BeCu	40	
2	OTQ-80-0.8-03-002	55-299-726-01	COVER カバ-	PEI	1	
1	OTQ-80-0.8-01-001	55-299-648-01	BODY 本体	PEI	1	

符号 SYM.	顧客品番 CUSTOMER'S PART NO.	図番 DWG. NO.	品名 NAME	材質 MAT'L	個数 Q'TY	備考 REMARKS
			機種 USED FOR	顧客品番 CUSTOMER'S PART NO.	一般公差 GENERAL TOLERANCES	±0.3
			承認者 APPROVED BY T. KASHINAGI	品名 NAME		尺度 SCALE 5:1
			検図者 CHECKED BY T. TACHIHARA	OTQ-80-0.8-03-00		REV. NO. d
			設計者 DESIGNED BY N. TAKAYAMA	IC SOCKET		
改訂 REVISED	95.07.01 DATE	AUTO CAD DRAWING 訂正箇所 REVISIONS	製図者 DRAWN BY N.T.	図番 DRAWING NO.	55-023-021-01	
			作成年月日 ISSUED ON			

マイクロフィルム用尺度
SCALE FOR MICRO FILM

50	
0	
L	
K	
J	
I	
H	
G	
F	
E	
D	
C	
B	
A	
部門枚数 SECTION SHEETS	